

IB/2004/03224



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 21 DEC 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03300245.2 ✓

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr.:  
Application no.: 03300245.2 ✓  
Demande no:

Anmeldetag:  
Date of filing: 08.12.03 ✓  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Method and system for controlling the level of a data signal read from an optical disc

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G11B20/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

## **"Method and system for controlling the level of a data signal read from an optical disc"**

### **FIELD OF THE INVENTION**

The present invention relates to a method and system for controlling the level of a data signal read from an optical disc.

The present invention also relates to a method of generating an information signal  
5 intended to indicate the presence of a defect at the surface of an optical disc.

This invention has many applications in the field of optical recording.

### **10 BACKGROUND OF THE INVENTION**

In optical recording systems such as CD, DVD, or Blue Ray (BD) disc, the information recorded on the optical disc is retrieved from a readout signal, conventionally represented by an eye pattern as illustrated in Fig.1. Information is often retrieved from a processing chain including a photo detector, a bit detection system, a preamplifier, a gain and  
15 level control, an equalizer, a timing recovery system and error correction system.

Data information is for example recorded on the disc by a series of pits and lands representing binary data, and forming a track. A laser spot remains locked to the track for passing-by the pit-land relief structure. The reflected light spot falls onto the photo-detector. The regions between the impressed pits reflect the incident light without destructive  
20 interference and hence, the corresponding readout signal derived from the photo detector reaches maximum values. Conversely, a minimum level of the readout signal corresponds to a light which is strongly reduced by interference while reflected by a pit. The readout signal as depicted in Fig.1, referenced by the dark level (DL), is thus spatially modulated by the pits and lands, which are integer multiples of the channel bits.

25 For ensuring a robust reading of the data stored on the disc, it is required to generate a readout signal varying between a low target level  $I_{\min\_target}$  and a high target level  $I_{\max\_target}$ , these targets levels being known from specifications or from a measurement.

Gain and level control are dedicated to bring the readout signal in an appropriate range, in particular by counteracting level variations due to a reduction of the disc reflectivity caused by a defect of the disc, such as a fingerprint, a scratch or a black dot.

5 Known gain and level control systems are based on combinations of peak detection and time constants. In such systems, gain is increased until a predefined peak level is exceeded. When this happens, gain is decreased again. A similar approach is used for level control. The gain and level adaptation is commonly done in using a time constant. When the time constant is large, the system response is slow but accurate in the nominal situation, as  
10 the gain and level control signals are usually not very noisy. On the other hand, a slow response prevents the system from quickly responding to defects. If the time constant is reduced, the system becomes jittery, thus degrading the performance which is measured in terms of jitter and error rate. The optimum setting is dependent on many parameters in drive and disc, and usually determined by trial and error.

15 This known method is limitative in that the optimal time constant is difficult to define, considering that it should be large to prevent baseline wander, but small to effectively remove undesired low-frequency variations due to disc defects.

## 20 OBJECT AND SUMMARY OF THE INVENTION

It is an object of the invention to propose an improved method of controlling the level of an input readout signal read from an optical disc.

25 To this end, the method according to the invention proposes to use an amplification step for amplifying the input readout signal by a adjustable gain, for generating an amplified output readout signal having an amplitude in the range  $[I_{\text{min\_target}}, I_{\text{max\_target}}]$ . The value of this gain is derived from a feed-back loop control in charge of comparing the level of the output readout signal to that of target levels  $I_{\text{min\_target}}$  and  $I_{\text{max\_target}}$ , and  
30 deriving a gain value taking into account the level of the input readout signal. This loop control allows to perform a clamping of the input readout signal, counteracting as a consequence the decrease of the input readout signal in case of a reflectivity reduction of the optical disc.

The method is based on the fact that the outer levels of the input readout signal reduce in similar way with respect to the dark level, because reflectivity of pit and land is deteriorated in equal way by the aforementioned defects of the optical disc. Thus, there is only one parameter to adjust, this parameter being the gain with respect to the dark level.

5        This method is also relevant in that the level control is independent of the frequency content of the readout signal because the control is only based on amplitude information.

It is also an object of the invention to propose a control system for controlling the level of an input readout signal, said control system comprising means for implementing the  
10       different steps of the above-mentioned method according to the invention.

In case of an important defect, such as a black dot or a deep scratch, the reflectivity of the laser beam is highly reduced. As a consequence, the input readout signal is of small amplitude and very noisy, so that it can be assumed that even if setting the gain to a very high  
15       value, data recovery is in this case nearly impossible.

An additionnal step is thus advantageously added to the above-mentioned method according to the invention. This additionnal step consists in a step of generating a signal being intended to take a first state if said gain is below a gain threshold, and a second state if said gain is above said gain threshold.

20       This information signal is used for indicating the presence of a defect at the surface of an optical disc resulting in a reflectivity reduction. This information signal may for example be used to improve the reading strategy of the optical disc, for example in jumping the area considered as comprising a defect.

25       Detailed explanations and other aspects of the invention will be given below.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

The particular aspects of the invention will now be explained with reference to the  
30       embodiments described hereinafter and considered in connection with the accompanying drawings, in which identical parts or sub-steps are designated in the same manner :

Fig.1 illustrates the eye pattern of a input readout signal read from an optical disc,

Fig.2 represents the flow chart of processing steps according to the invention,

Fig.3 represents an embodiment of a control system according to the invention,

Fig.4 illustrates by an example the method according to the invention.

## DETAILED DESCRIPTION OF THE INVENTION

5 Fig.2 represents the flow chart of processing steps for controlling the level of an input readout signal  $S_{in}$  read from an optical disc, for generating an output readout signal  $S_{out}$ .

This method comprises a step 101 of amplifying the input readout signal  $S_{in}$  by a gain  $G$  for generating the output readout signal  $S_{out}$ . Readout signals are thus linked by the  
10 following relation :

$$S_{out} = G * S_{in} \quad \text{Eq.1}$$

The gain  $G$  is initially set to an arbitrary value  $G_0$ , for example  $G_0 = 1$ .

15 This method comprises a step 102 of comparing said output readout signal  $S_{out}$  with a maximum target level  $I_{max\_target}$  and with a minimum target level  $I_{min\_target}$ . The target levels are for example known from specifications, or chosen by measurement so as to be close to the maximum and minimum levels of the input readout signal  $S_{in}$  in optimal conditions (i.e. without reduction of the laser beam reflected from the optical disc).

20 This method comprises a first step 103 of setting said gain  $G$  to a value  $G_1$  defined as the ratio between said maximum target level  $I_{max\_target}$  and the level of said input readout signal  $S_{in}$ , if the level of said output readout signal  $S_{out}$  exceeds said maximum target level  $I_{max\_target}$ . This step 103 is summarized by the following first rule :

$$\begin{array}{ll} \text{if} & S_{out} > I_{max\_target}, \\ \text{then} & G = G_1 = I_{max\_target} / S_{in} \end{array} \quad \text{Eq.2}$$

By setting the gain  $G$  to a particular value  $G_1$ , the step 103 results in a clipping of the readout signal to  $I_{max\_target}$ . Consequently, the readout signal is brought to within the range  
30  $[I_{min\_target}, I_{max\_target}]$ .

This method comprises a second step 104 of setting said gain  $G$  to a value defined  $G_2$  as the ratio between said minimum target level  $I_{min\_target}$  and the level of said input readout signal  $S_{in}$ , if the level of said output readout signal  $S_{out}$  drops below said

minimum target level  $I_{\min\_target}$ . This step 104 is summarized by the following second rule:

$$\begin{array}{ll} \text{if } S_{out} < I_{\min\_target}, & \\ \text{then } G = G2 = I_{\min\_target} / S_{in} & \text{Eq.3} \end{array}$$

By setting the gain  $G$  to a particular value  $G2$ , the step 104 results in a clipping of the readout signal to  $I_{\min\_target}$ . Consequently, the readout signal is brought to within the range  $[I_{\min\_target}, I_{\max\_target}]$ .

10

This method comprises a third step 105 of setting said gain  $G$  to the value as previously set by said first and second steps 103 and 104 of setting, if the level of said output readout signal  $S_{out}$  does not exceed said maximum target level  $I_{\max\_target}$  nor drop below said minimum target level  $I_{\min\_target}$ . In other words, if the output readout signal  $S_{out}$  stay in the range  $[I_{\min\_target}, I_{\max\_target}]$ , the gain  $G$  is not changed, and it remains either equal to the initial gain value  $G0$ , or to the gain value  $G1$  defined by the first rule, or to the gain value  $G2$  defined by the second rule.

Note that the procedure according to the invention of bringing the readout signal to within the range  $[I_{\min\_target}, I_{\max\_target}]$  can be executed continuously and possibly instantaneously, to track the variations in play back conditions (i.e. reflectivity changes).

The processing steps 102-103-104-105 can be the basis for defining a method of generating an information signal  $S_{info}$  indicating a defect of an optical disc. This method of generating an information signal is based on the variation analysis of the gain value  $G$ .

To this end, this method of generating an information signal  $S_{info}$  comprises a step 106 of comparing said gain  $G$  with a gain threshold  $G_{th}$ , and a step 107 of generating said information signal having a first state  $s1$  if said gain  $G$  is below said gain threshold  $G_{th}$ , and a second state  $s2$  if said gain  $G$  is above said gain threshold  $G_{th}$ .

The input readout signal can be considered as the sum of a data signal, and a noise signal of constant amplitude. If the input readout signal  $S_{in}$  is very low, thus mainly comprising a noise signal, a gain  $G$  having a large value is derived from step 103. Since it is no sense amplifying an input readout signal  $S_{in}$  mainly comprising a noise signal, because detection of data is impossible in this case, the gain threshold  $G_{th}$  may be defined as the

ratio  $I_{\min\_target} / \sigma$ , where  $\sigma$  corresponds to a measure of the noise level in the input readout signal  $S_{in}$ .

This information signal  $S_{info}$  may for example be used to improve the reading strategy of the optical disc, for example in jumping the area considered as comprising a defect.

Fig.3 represents an embodiment of a control system according to the invention for controlling the level of an input readout signal  $S_{in}$  read from an optical disc, for generating an output readout signal  $S_{out}$ , said system comprising :

- means 301 for amplifying said input readout signal  $S_{in}$  by a gain  $G$  for generating said output readout signal  $S_{out}$ ,
- means 302 for comparing said output readout signal  $S_{out}$  with a maximum target level  $I_{\max\_target}$  and with a minimum target level  $I_{\min\_target}$ ,
- means 302 for setting said gain  $G$  to a value defined as the ratio between said maximum target level  $I_{\max\_target}$  and the level of said input readout signal  $S_{in}$ , if the level of said output readout signal  $S_{out}$  exceeds said maximum target level  $I_{\max\_target}$ ,
- means 302 for setting said gain  $G$  to a value defined as the ratio between said minimum target level  $I_{\min\_target}$  and the level of said input readout signal  $S_{in}$ , if the level of said output readout signal  $S_{out}$  drops below said minimum target level  $I_{\min\_target}$ ,
- means 302 for setting said gain  $G$  to the value as previously set by said first and second means 302 for setting, if the level of said output readout signal  $S_{out}$  does not exceed said maximum target level  $I_{\max\_target}$  nor drop below said minimum target level  $I_{\min\_target}$ .

The processing may be performed in the digital domain. Means 302 correspond to a signal processor executing code instructions stored in a memory device (not shown). These code instructions carry out the functions realized by steps 102-103-104-105 previously described, taking into account the value of input parameters  $I_{\min\_target}$  and  $I_{\max\_target}$  for example stored in said memory device. Analogue to digital converters (not shown) are used for sending to the processing means 302 a digital value of the input readout signal  $S_{in}$  and the output readout signal  $S_{out}$ .



Means 301 may also be performed by a signal processor, or alternatively by a conventional amplifier using a transistor-based structure. In the latter case, the gain defined by means 302 is buffered in an input digital register, then converted in the analogue domain by a digital to analogue converter (not shown) for varying some gain parameters of the amplification means 301 (e.g. the charge of a capacitor by a current proportional to the analogue gain value).

Fig.4 illustrates by an example the level control performed by the method according to the invention. In this figure :

- signal  $S_{theo}$  corresponds to the temporal variation of the theoretical readout signal that should be derived from the reading of the optical disc, without reflectivity reduction. This signal varies in the range  $[I_{min\_target}, I_{max\_target}]$ .
- $S_{in}$  corresponds to the temporal variation of the experimental input readout signal derived from an photo detector when the optical disc is read, for example a four-quadrants detector embedded in a reader apparatus intended to read the optical disc,
- $\alpha$  corresponds to the temporal variation of the reflectivity attenuation caused by the defect of the optical disc, the attenuation being for example caused by a scratch, a fingerprint or a black dot at the surface of the optical disc. This attenuation is of course not known by the system control.
- $S_{out}$  corresponds to the temporal variation of the output readout signal after being passed through the control system according to the invention,
- $G$  corresponds to the temporal variation of the amplification gain applied to the input readout signal  $S_{in}$  for generating the output readout signal  $S_{out}$ .

25

In the temporal range  $[t_0, t_1]$ , the reflectivity of the laser beam applied to the optical disc is not reduced since no defects are present at the surface of the optical disc. The input readout signal  $S_{in}$  is in the range  $[I_{min\_target}, I_{max\_target}]$ , and the gain  $G$  is for example set to an initial default value equal to 1. The output readout signal  $S_{out}$  is identical to the input readout signal  $S_{in}$ .

30

In the temporal range  $[t_1, t_2]$ , the reflectivity of the laser beam applied to the optical disc is attenuated by a factor 2, because of some defects present at the surface of the optical disc. The input readout signal  $S_{in}$  immediately decreases by a factor 2, but still remains in

the range  $[I_{\min\_target}, I_{\max\_target}]$ , so that the gain  $G$  remains equal to 1. The output readout signal  $S_{out}$  is identical to the input readout signal  $S_{in}$ .

In the temporal range  $[t2, t3]$ , the reflectivity of the laser beam applied to the optical disc is still attenuated by a factor 2. The input readout signal  $S_{in}$  now drops below  
 5  $I_{\min\_target}$  until reaching  $I_{\min\_target} / 2$ . The output readout signal  $S_{out}$  is also inclined to drop below  $I_{\min\_target}$ , but  $S_{out}$  is immediately corrected by the control system in increasing the gain  $G$  according to the Eq.3. The gain  $G$  increases until reaching a value of 2. The signal  $S_{out}$  is thus clipped to  $I_{\min\_target}$ .

In the temporal range  $[t3, t4]$ , the reflectivity of the laser beam applied to the optical  
 10 disc is still attenuated by a factor 2. The input readout signal  $S_{in}$  now starts increasing above  $I_{\min\_target} / 2$ . With a gain previously set to 2, the output readout signal  $S_{out}$  is now inclined to exceed  $I_{\min\_target}$ , so that  $S_{out}$  is still in the range  $[I_{\min\_target}, I_{\max\_target}]$ . As a consequence, the gain  $G$  applied to signal  $S_{in}$  remains set to the previously value defined at time  $t3$  according to Eq.3. The signal  $S_{out}$  is identical to the  
 15 theoretical data signal  $S_{theo}$ , which means that the reduction of the laser beam reflectivity is compensated by the control system according to the invention.

In the temporal range  $[t4, t5]$ , the optical disc has no more defects on its surface. The laser beam is thus no more attenuated so that the attenuation gain  $\alpha$  goes down to 1. The input readout signal  $S_{in}$  is now identical to signal  $S_{theo}$ . With a gain previously set to 2,  
 20 the output readout signal  $S_{out}$  is now inclined to exceed  $I_{\max\_target}$ , so that  $S_{out}$  is immediately corrected by the control system in decreasing the gain  $G$  according to Eq.2. The gain  $G$  decreases until reaching a value of 1. The signal  $S_{out}$  is thus clipped to  $I_{\max\_target}$ .

In the temporal range  $[t5, t6]$ , the input readout signal  $S_{in}$  now starts decreasing  
 25 below  $I_{\max\_target}$ . With a gain previously set to 1, the output readout signal  $S_{out}$  is now inclined to drop below  $I_{\max\_target}$ , so that  $S_{out}$  is in the range  $[I_{\min\_target}, I_{\max\_target}]$ . As a consequence, the gain  $G$  applied to signal  $S_{in}$  remains set to the previously value defined at time  $t5$  according to Eq.2. The signal  $S_{out}$  is thus identical to the input readout signal  $S_{in}$  and to the theoretical data signal  $S_{theo}$ .

30

It is noted that the readout signal in the temporal range  $[t1, t2]$  cannot be recovered since the input readout signal  $S_{in}$  is still in the range  $[I_{\min\_target}, I_{\max\_target}]$  which is considered as a correct range, as well in the temporal ranges  $[t2, t3]$  and  $[t4, t5]$  since the output readout signal  $S_{out}$  is clipped to  $I_{\min\_target}$  and  $I_{\max\_target}$  respectively.

In the temporal range  $[t_0, t_{s1}]$ , the gain  $G$  is below the gain threshold  $G_{th}$ , so that the information signal  $S_{info}$  has a first state  $s_1$ .

5 In the temporal range  $[t_{s1}, t_{s2}]$ , the gain  $G$  is above the gain threshold  $G_{th}$ , so that the information signal  $S_{info}$  has a second state  $s_2$ .

In the temporal range  $[t_{s2}, t_6]$ , the gain  $G$  is below the gain threshold  $G_{th}$ , so that the information signal  $S_{info}$  has the first state  $s_1$ .

10 The control system according to the invention can advantageously be implemented in an apparatus for reading data stored on an optical disc.

15 Use of the verb "comprise" and its conjugations does not exclude the presence of elements or steps other than those stated in the claims. Use of the article "a" or "an" preceding an element or step does not exclude the presence of a plurality of such elements or steps.

## CLAIMS

1. Method of controlling the level of an input readout signal ( $S_{in}$ ) read from an optical disc for generating an output readout signal ( $S_{out}$ ), said method comprising :
  - a step (101) of amplifying said input readout signal ( $S_{in}$ ) by a gain ( $G$ ) for generating said output readout signal ( $S_{out}$ ),
  - 5 - a step (102) of comparing said output readout signal ( $S_{out}$ ) with a maximum target level ( $I_{max\_target}$ ) and with a minimum target level ( $I_{min\_target}$ ),
  - a first step (103) of setting said gain ( $G$ ) to a value defined as the ratio between said maximum target level ( $I_{max\_target}$ ) and the level of said input readout signal ( $S_{in}$ ), if the level of said output readout signal ( $S_{out}$ ) exceeds said maximum target level
  - 10 ( $I_{max\_target}$ ),
  - a second step (104) of setting said gain ( $G$ ) to a value defined as the ratio between said minimum target level ( $I_{min\_target}$ ) and the level of said input readout signal ( $S_{in}$ ), if the level of said output readout signal ( $S_{out}$ ) drops below said minimum target level ( $I_{min\_target}$ ),
  - 15 - a third step (105) of setting said gain ( $G$ ) to the value as previously set by said first and second steps (103, 104) of setting, if the level of said output readout signal ( $S_{out}$ ) does not exceed said maximum target level ( $I_{max\_target}$ ) nor drop below said minimum target level ( $I_{min\_target}$ ).
  
- 20 2. Method of generating an information signal indicating a defect of an optical disc, said method comprising :
  - a step (101) of amplifying an input readout signal ( $S_{in}$ ) by a gain ( $G$ ) for generating an output readout signal ( $S_{out}$ ),
  - a step (102) of comparing said output readout signal ( $S_{out}$ ) with a maximum target
  - 25 level ( $I_{max\_target}$ ) and with a minimum target level ( $I_{min\_target}$ ),
  - a first step (103) of setting said gain ( $G$ ) to a value defined as the ratio between said maximum target level ( $I_{max\_target}$ ) and the level of said input readout signal ( $S_{in}$ ), if the level of said output readout signal ( $S_{out}$ ) exceeds said maximum target level ( $I_{max\_target}$ ),

- a second step (104) of setting said gain (G) to a value defined as the ratio between said minimum target level (I\_min\_target) and the level of said input readout signal (S\_in), if the level of said output readout signal (S\_out) drops below said minimum target level (I\_min\_target),
  - 5    - a third step (105) of setting said gain (G) to the value as previously set by said first and second steps (103, 104) of setting, if the level of said output readout signal (S\_out) does not exceed said maximum target level (I\_max\_target) nor drop below said minimum target level (I\_min\_target),
  - a step (106) of comparing said gain (G) with a gain threshold (G\_th),
  - 10   - a step (107) of generating said information signal having a first state (s1) if said gain (G) is below said gain threshold (G\_th), and a second state (s2) if said gain (G) is above said gain threshold (G\_thr).
3.    System for controlling the level of an input readout signal (S\_in) read from an optical
- 15   disc for generating an output readout signal (S\_out), said system comprising :
- means (101) for amplifying said input readout signal (S\_in) by a gain (G) for generating said output readout signal (S\_out),
  - means (102) for comparing said output readout signal (S\_out) with a maximum target level (I\_max\_target) and with a minimum target level (I\_min\_target),
  - 20   - means (103) for setting said gain (G) to a value defined as the ratio between said maximum target level (I\_max\_target) and the level of said input readout signal (S\_in), if the level of said output readout signal (S\_out) exceeds said maximum target level (I\_max\_target),
  - means (104) for setting said gain (G) to a value defined as the ratio between said
  - 25   minimum target level (I\_min\_target) and the level of said input readout signal (S\_in), if the level of said output readout signal (S\_out) drops below said minimum target level (I\_min\_target),
  - means (105) for setting said gain (G) to the value as previously set by said first and second means (103, 104) for setting, if the level of said output readout signal (S\_out)
  - 30   does not exceed said maximum target level (I\_max\_target) nor drop below said minimum target level (I\_min\_target).

4. Apparatus for reading an optical disc, said apparatus comprising a system for controlling the level of an input readout signal ( $S_{in}$ ) read from said optical disc for generating an output readout signal ( $S_{out}$ ), said system comprising :

- 5       - means (101) for amplifying said input readout signal ( $S_{in}$ ) by a gain ( $G$ ) for generating said output readout signal ( $S_{out}$ ),
- means (102) for comparing said output readout signal ( $S_{out}$ ) with a maximum target level ( $I_{max\_target}$ ) and with a minimum target level ( $I_{min\_target}$ ),
- means (103) for setting said gain ( $G$ ) to a value defined as the ratio between said maximum target level ( $I_{max\_target}$ ) and the level of said input readout signal ( $S_{in}$ ),  
10       if the level of said output readout signal ( $S_{out}$ ) exceeds said maximum target level ( $I_{max\_target}$ ),
- means (104) for setting said gain ( $G$ ) to a value defined as the ratio between said minimum target level ( $I_{min\_target}$ ) and the level of said input readout signal ( $S_{in}$ ),  
15       if the level of said output readout signal ( $S_{out}$ ) drops below said minimum target level ( $I_{min\_target}$ ),
- means (105) for setting said gain ( $G$ ) to the value as previously set by said first and second means (103, 104) for setting, if the level of said output readout signal ( $S_{out}$ ) does not exceed said maximum target level ( $I_{max\_target}$ ) nor drop below said minimum target level ( $I_{min\_target}$ ).

20

5. A computer program comprising code instructions for implementing the steps of the method as claimed in claim 1 or 2.

**ABSTRACT**

The invention relates to a method of controlling the level of an input readout signal read from an optical disc. The method proposes to use an amplification step for amplifying the input readout signal by a adjustable gain, for generating an amplified output readout signal having an amplitude in the range  $[I_{\min\_target}, I_{\max\_target}]$ . The value of this gain is derived from a feed-back loop control in charge of comparing the level of the output readout signal to that of target levels  $I_{\min\_target}$  and  $I_{\max\_target}$ , and deriving a gain value taking into account the level of the input readout signal. This loop control allows to perform a clamping of the input readout signal, counteracting as a consequence the decrease of the input readout signal in case of a reflectivity reduction of the optical disc.

Use : Optical disc reader

Ref : Fig.3

1/4

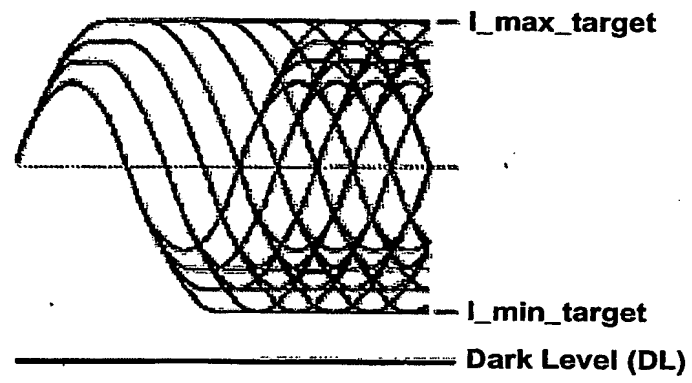


FIG.1



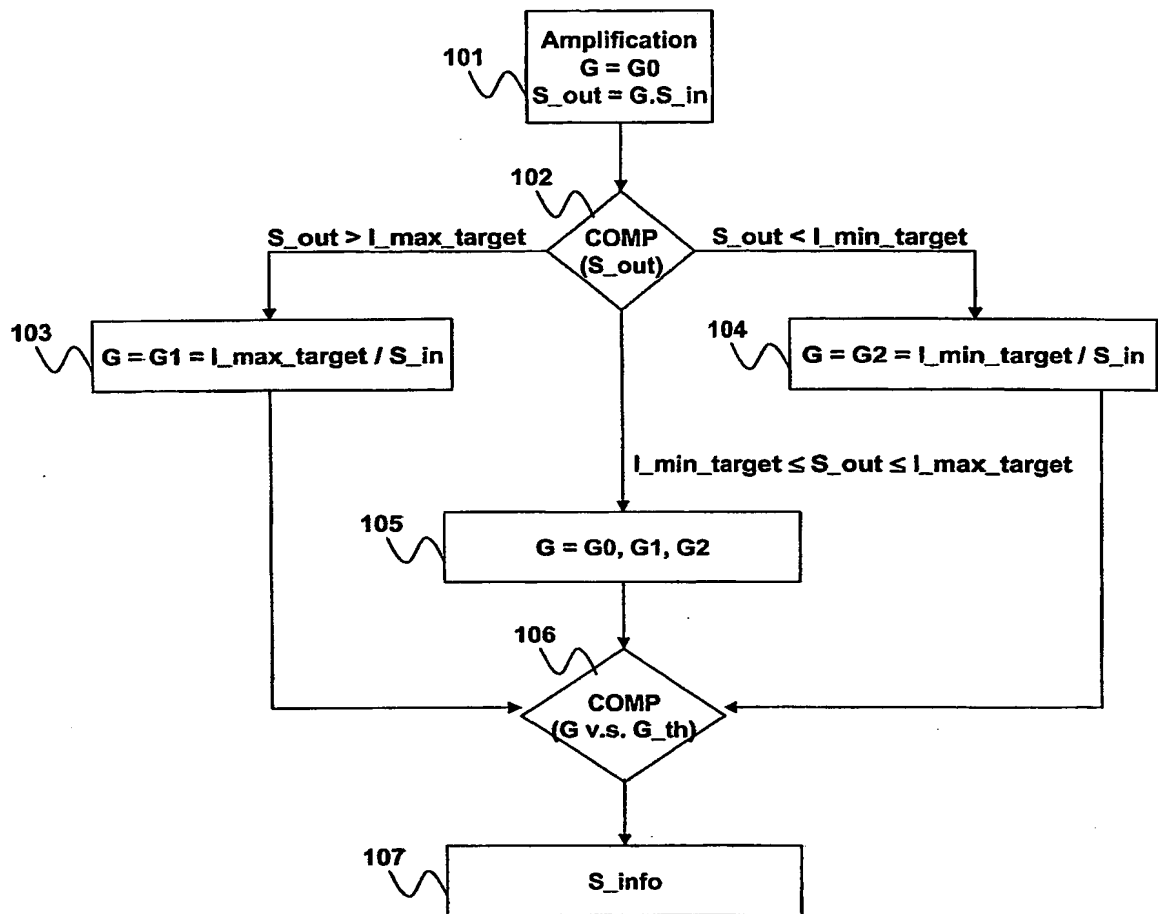


FIG.2

3/4

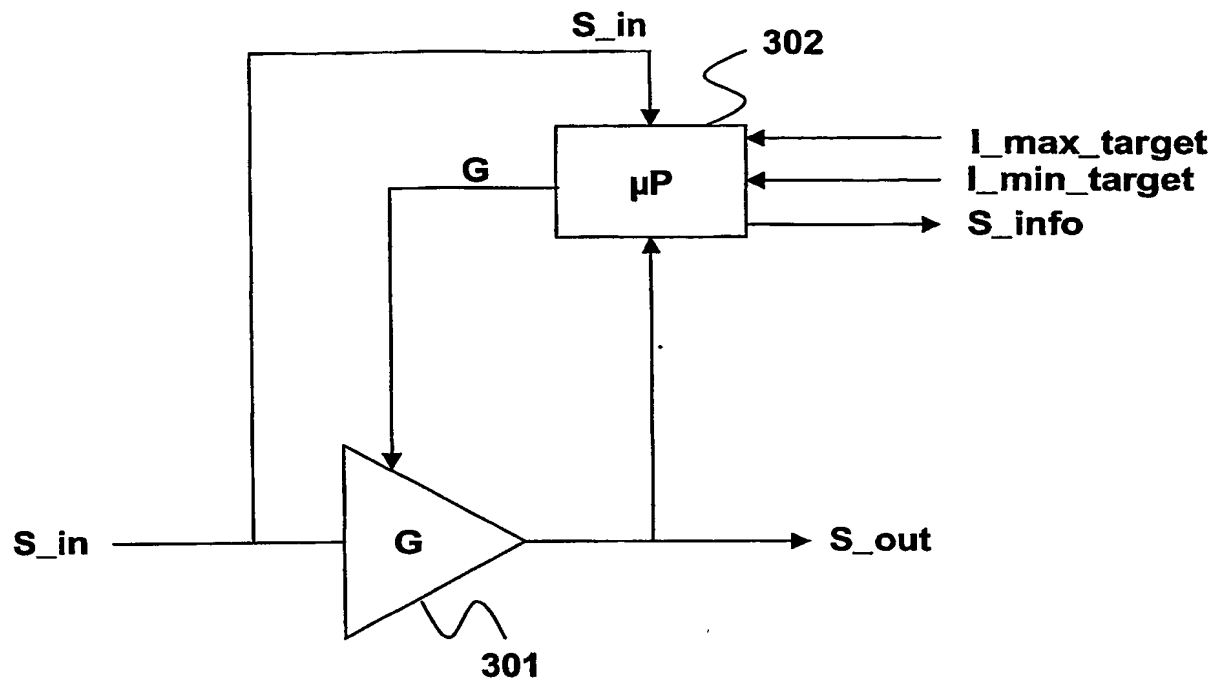


FIG.3

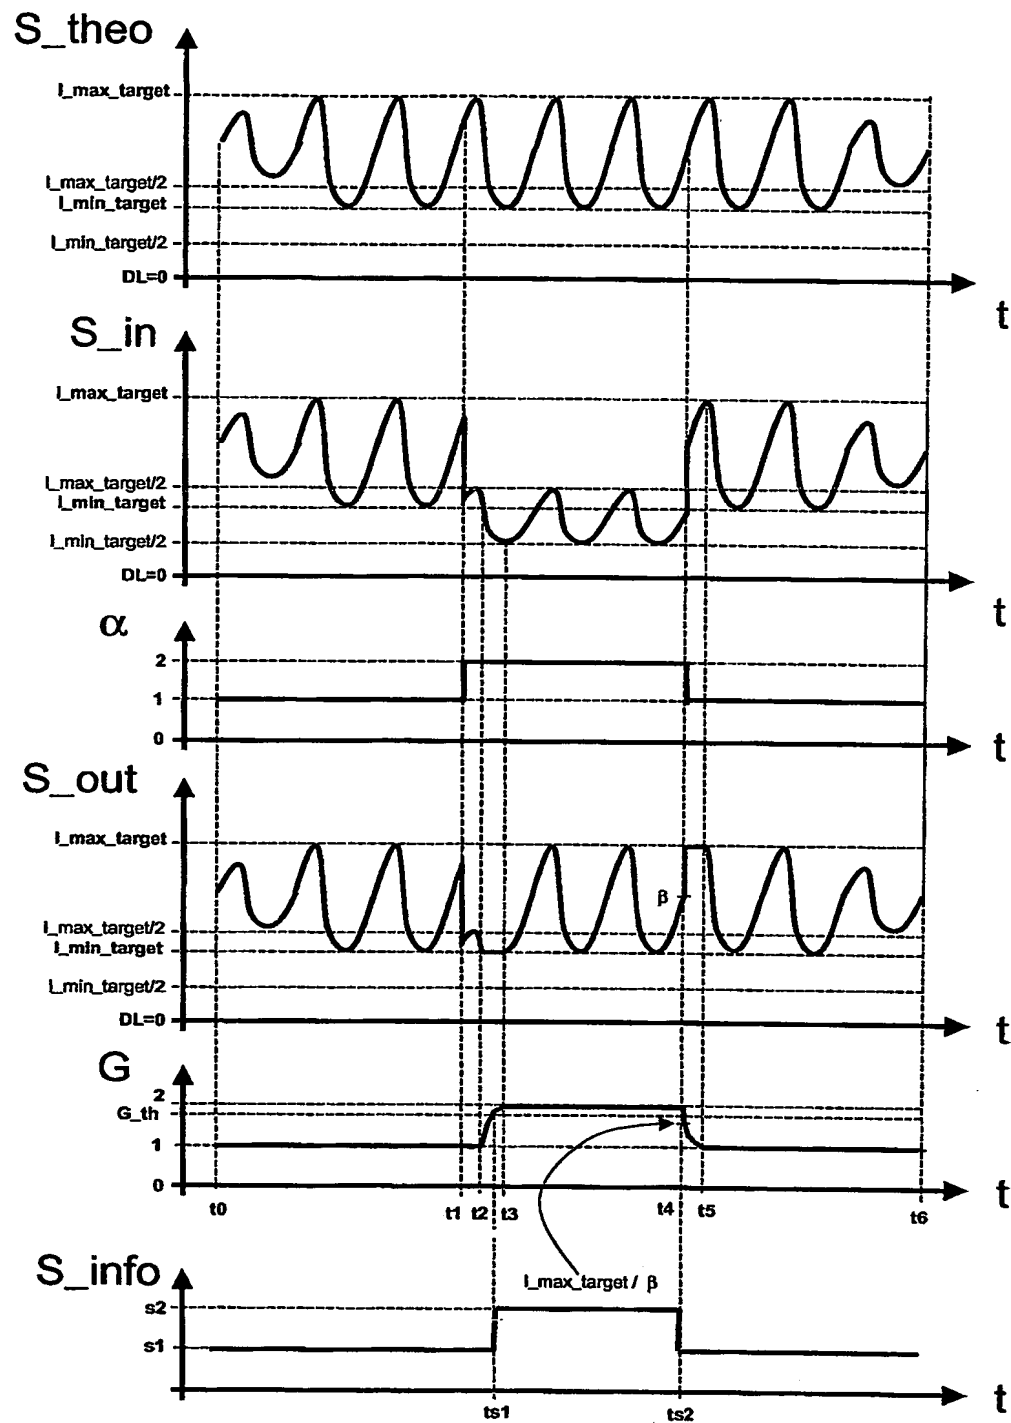


FIG.4

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record.**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image  
problems checked, please do not report these problems to  
the IFW Image Problem Mailbox.**